

Z-3 PM^{cold}, PM Tooling Steel

Data Sheet - Tooling Alloys

ZAPP

Zapp is certified to ISO 9001





Key Features of Zapp's Powder Metallurgical Tooling Steel Z-3 PM^{cold}

- Produced using powder metallurgical processes
- High toughness with good wear resistance
- High break resistance
- Very good wear resistance in comparison with typical cold work steels
- Case hardness up to 60 HRC possible

Typical Areas of Application

- Thick sheet and fine blanking tools
- Pressing and forming tools
- Cold and warm forming tools
- Bulk metal forming tools

Powder metallurgical vs. conventional microstructure



The homogeneous microstructure which is obtained by using powder metallurgical processes vs. the coarse carbide structure of conventionally produced steel

Physical properties

Modulus of elasticity E [GPa]	207
Density [kg/dm ³]	7.8
Thermal expansion coefficient [mm/(mm/K)] in a temperature range up to 20 °C – 200 °C	10.6 x 10 ⁻⁶
Thermal conductivity [W/(m*K)]	24.2

Delivery condition

As-delivered condition	Soft-annealed, approx. 240 HB
Product form	Round bars, flat bars
Surface finish	Mechanically machined


Typical chemical composition (weight %)

C	Cr	Mo	W	V
0.8	7.5	1.3	-	2.8

Qualitative comparison of the most important properties


Toughness

■ relative toughness (1 = low up to 10 = high)

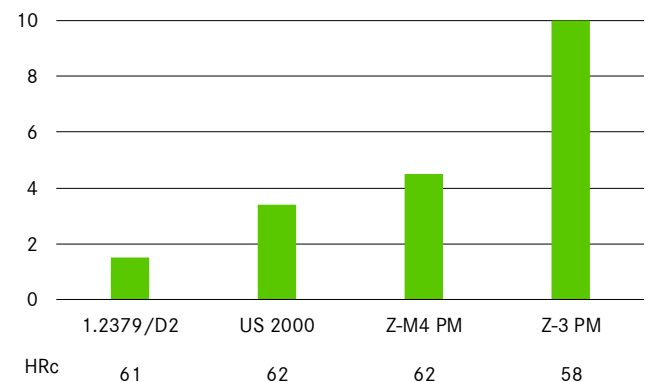

Wear resistance

■ relative wear resistance (1 = low up to 10 = high)

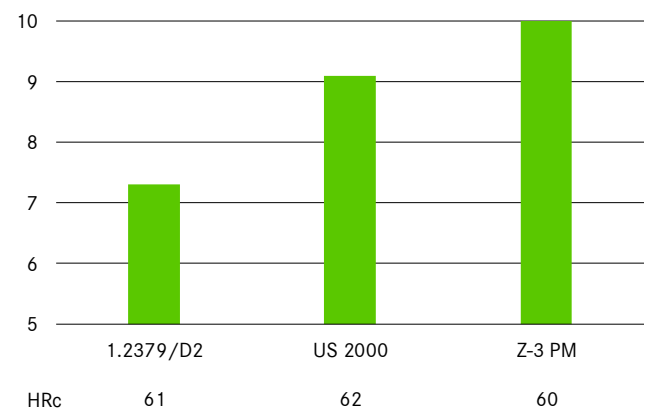

Heat Treatment

Soft Annealing

- In neutral atmosphere at ~ 860 °C and ~ 4 h exposure time (after through-heating)
- Followed by furnace cooling (optimum cooling rate max. 10 °C/h up to 540 °C)
- Soft annealing hardness ~ 240 HB

Stress Relief Annealing

~ 650 °C/~ 2 h exposure time (after through-heating)
followed by furnace cooling

Surface Treatments

Tempering temperatures of ≥ 540 °C
provide the prerequisite for subsequent
nitriding or PVD coating.

You can find more materials at:


www.zapp.com/en-uk/materials/powder-metallurgical-tool-steel

Zapp Precision Metals GmbH ensures professional execution of all heat treatment steps as well as their preparation and post-processing (e.g., charging, hardness testing, straightening processes, etc.) – always with the aim of obtaining the optimum component properties!

We are happy to assist you with constructive advice!

Tempering diagram

Härte, HRc

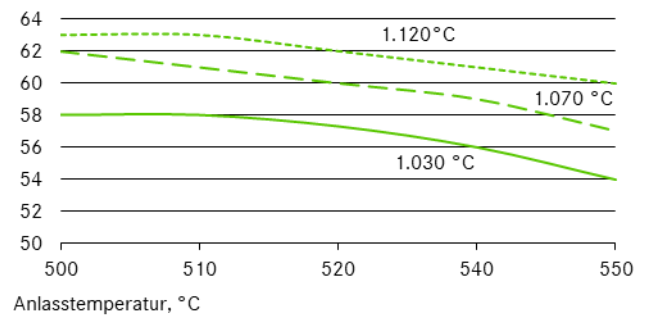

Vacuum heat treatment instructions

Pre-heating	professional heating, 3 pre-heating stages recommended
Vacuum heating	from 1,030 to 1,120 °C, see table
Exposure time	from 20 to 45 minutes after through-heating, see table
Cooling	in vacuum, a quenching pressure of at least 6 bar is required
Tempering	at least 3 times for 2 hours each according to table, fourth tempering recommended, allow to equilibrate to room temperature in between

Desired hardness HRc \pm 1	Hardening temperature °C	Exposure time at hardening temperature minutes	Tempering °C
56	1,030	45	540
57	1,070	30	550
59	1,070*	30	540
60	1,120	20	550
61	1,120	20	540

* best combination of toughness/compressive strength

The maximum specified hardening temperature of 1,120 °C should not be exceeded.

Hardening with further heat treatment processes is possible, but should be discussed in advance!

TOOLING ALLOYS

Zapp Precision Metals GmbH

Balcke-Dürr-Allee 1
40882 Ratingen
Phone +49 2304 79-566
Sales.TA@zapp.com
www.zapp.com

Further information regarding our products and locations are available in our image brochure and on our homepage at www.zapp.com.

The information, illustrations, drawings, dimensional and weight data, and other data included in this data sheet are intended only for the purposes of describing our products and represent non-binding average values. They do not constitute quality data, nor can they be used as the basis for any guarantee of quality or durability. The applications presented serve only as illustrations and can be construed neither as quality data nor as a guarantee in relation to the suitability of the materials. This cannot substitute for comprehensive consultation on the selection of our products and on their use in a specific application. This data sheet is not subject to change control. Subject to prior sale.
Last revision: March 2023