


Ergste® 1.4005IA Automotive Datasheet & Automation Technology | Precision Wire



Zapp is Certified to ISO 9001 | IATF 16949

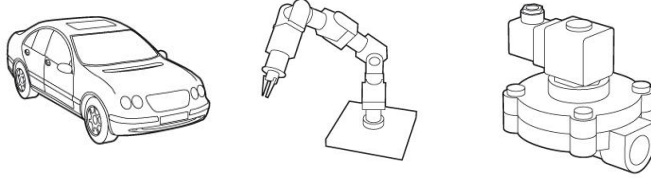

Categorization

- Ferritic, corrosion resistant steel
- DIN EN 10088-3
- AISI 416

Typical Applications

Ergste® 1.4005IA is mainly used in fuel injection systems and in pneumatic valves.

Processing and Usage Properties

Ergste® 1.4005IA (similar to X12CrS13) is a stainless free cutting steel with excellent soft magnetic properties. It is designed for the volume production of precision turned parts. It is resistant in water, steam and other less aggressive media.

If welding is necessary, plasma- or laser welding should be preferred. The steel is suitable for cold forming operations within certain limits.

For improved properties in selective cases we recommend the following Ergste® grades:

Cold Heading

Ergste® 1.4003IA
Ergste® 1.4016IM

Corrosion Resistance

Ergste® 1.4105IL
Ergste® 1.4113IM

Zapp Precision Metals GmbH

PRECISION WIRE
Letmather Straße 69
58239 Schwerte
P.O. Box 17 20
58212 Schwerte
Phone +49 2304 79-148
Fax +49 2304 79-6148
precisionwire@zapp.com

www.zapp.com

Typical Analysis*

C	Si	Mn	S	Cr	Mo
0.02	1.10	0.80	0.30	13.00	0.40

* weight percentage/approximate value

Mechanical and Physical Properties

Tensile strength (soft annealed)	350 - 550 [MPa]
----------------------------------	-----------------

Magnetic Properties of Round Bars

Coercitive strength	Hc < 180 [A/m]
Maximum relative permeability	$\mu_{max} > 1,700$
Saturation polarization	J _s > 1.7 [T]

Delivery Forms*

Round bars	Annealed, ground
Profiles	Annealed, straightened

* Crack tested according to DIN EN 10088-3, Table 1 Surface class 1-3, US-Testing: KSR (FBH) 0.7 mm or better

Further information regarding our products and locations are available in our image brochure and under www.zapp.com

The illustrations, drawings, dimensional and weight data and other information included in this data sheet are intended only for the purposes of describing our products and represent non-binding average values. They do not constitute quality data, nor can they be used as the basis for any guarantee of quality or durability. The applications presented serve only as illustrations and can be construed neither as quality data nor as a guarantee in relation to the suitability of the material. This cannot substitute for comprehensive consultation on the selection of our products and on their use in a specific application. The brochure is not subject to change control.

Last revision: July 2020